

### Features & Benefits

- Controls up to 60 PPF Tech LED fixtures per circuit
- 2 circuits per control supports up to 120 total PPF Tech LED fixtures
- Lithium battery backup
- Water resistant M16 connections


### Specifications

Dimensions (L x W x H):	4.3" x 2.5" x 1.2"
Weight:	205g
Input power:	100-240 VAC, .5A, 50/60 Hz
Output:	1-11.5 Vdc
Max # of fixtures per circuit	60 ( x 2 circuits)
Max connection length:	250'
Warranty	2 Year



### Contents

- (A) Controller (1)
- (B) 12Vdc adapter (1)
- (C) Temperature sensor (1), 2<sup>nd</sup> sold separately
- (D) Mounting screws (2)

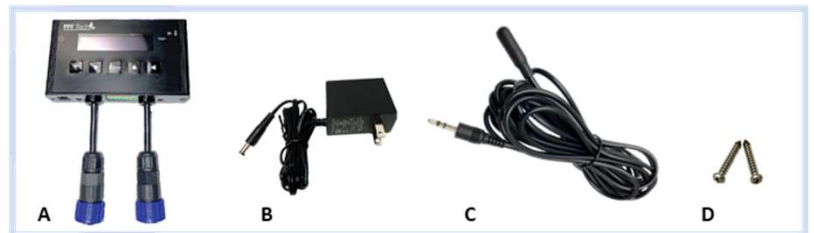

### Setup

- (A) Connect one output lead of CD-3 directly to M16 input cable on PPF Tech fixture
- (B) Optionally connect to CC-5-1 or CC-10-1 M16 control cable to extend cable length
- Connect all fixtures within a group via control cables from fixture or via CC-5-1 or CC-10-1 extension cables
- Mount CD-3 control in a dry location and connect to power using DC adapter
- Follow set-up steps within CD-3 Control Manual

