


Features & Benefits

- Power eco-link - daisy chain up to 5 fixtures / circuit)
- Control eco-link - daisy chain up to 30 fixtures / circuit)
- IP65 Rating – suitable for wet environment
- Secure M19 twist-lock power connections
- Quality components including Osram/Samsung LED array
- 0-10V dimming capable (OFF to 100%)
- 1,720 μmol
- Quick-connect assembly (6 bars)
- Long life – 50,000 hours
- Full spectrum – 4000K

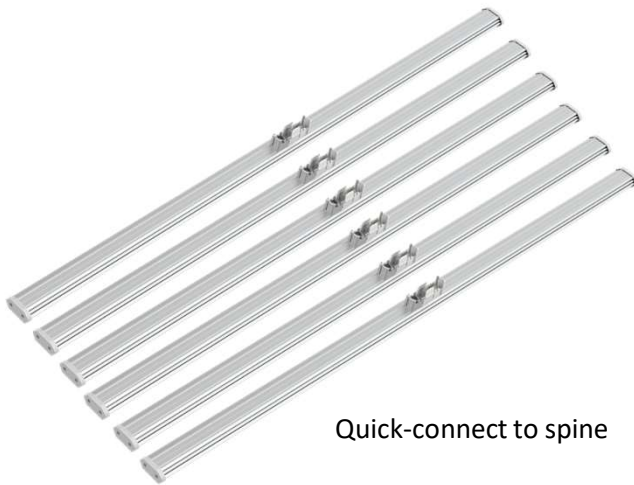

Quick-connect to spine

Electrical

Input power (W)	660 \pm 10%
Input voltage (V)	120-277

AC Voltage (V)	120	240	277
AC Current (A)	5.81	2.84	2.45
Power Factor	0.98	0.96	0.95
Max fixtures / 20A	2	5	5

Mechanical & Safety



Weight (lbs.)	25.6
Dimensions (LxWxH inches)	42 x 47 x 4.8
Input/output power	M19 3-pin
Input/output control	M19 2-pin
Operating temperature ($^{\circ}\text{C}$)	-20 to 45

3 Year Warranty



Output

- PPF (μmol) 1,720
- Efficacy ($\mu\text{mol}/\text{J}$) 2.6
- Spectrum Full
- CCT (Kelvin) 4000
- Spectrum Full cycle growth

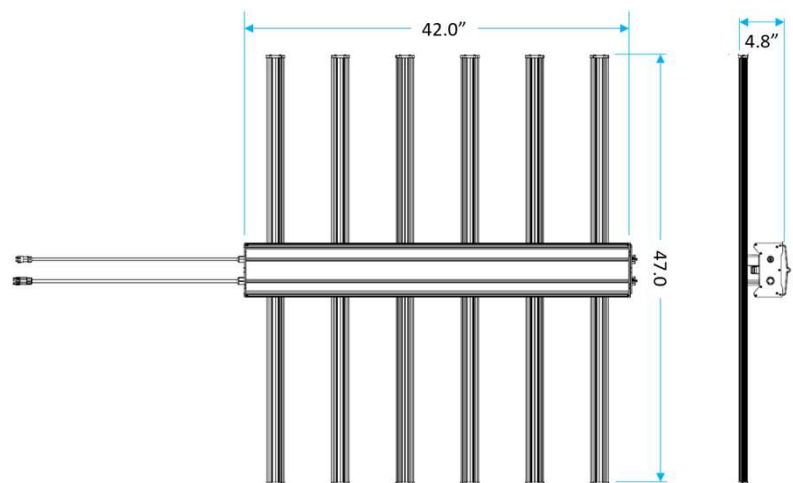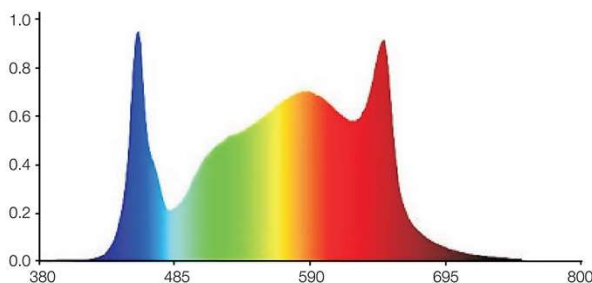


Ordering Codes: Power Cords

PC-14G-6-120	Power cord 6' with NEMA 5-15P 120V plug
PC-14G-6-240	Power cord 6' with NEMA 6-15P 240V plug
PC-14G-6-277	Power cord 6' with NEMA L7-15P 277V plug
PCF-14G-5	Fixture to fixture power cord 5' with M19 plugs
PCF-14G-10	Fixture to fixture power cord 10' with M19 plugs

Ordering Codes: Controls

CC-5-1	Fixture to fixture control cord 5', M16 plugs
CC-10-1	Fixture to fixture control cord 10', M16 plugs
CD-1	Control Device
GA-1	Gateway

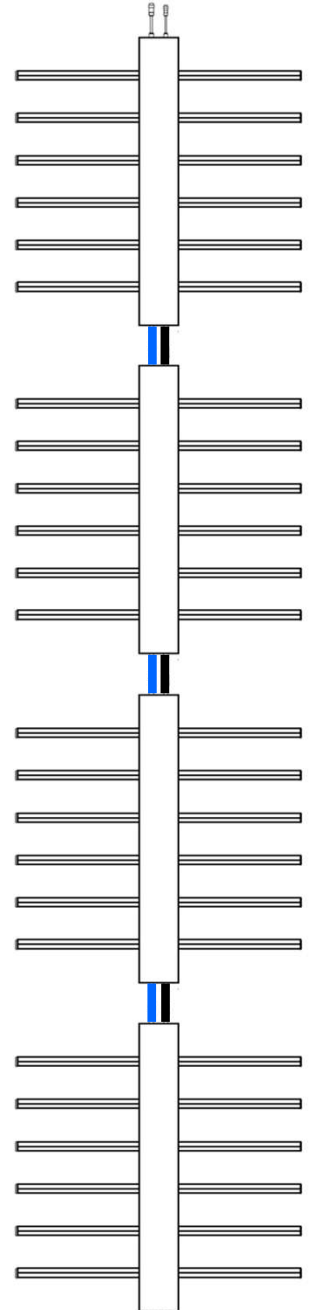

EXAMPLE LAYOUT

Daisy chain Power cord
 Daisy chain control cord