

Features & Benefits

- Easily connects PPF Tech fixtures to a variety of control brands having RJ12 output
- Quick connect, damp rated M16 connection

Electrical

- For 0-10V control only (on/off/dim)

Mechanical & Safety

- Length: 5 feet




M16 Connector

- Connect to first fixture

RJ12 Connector

- Connect to control

Trolmaster HCS-1 Hydro-X Setup

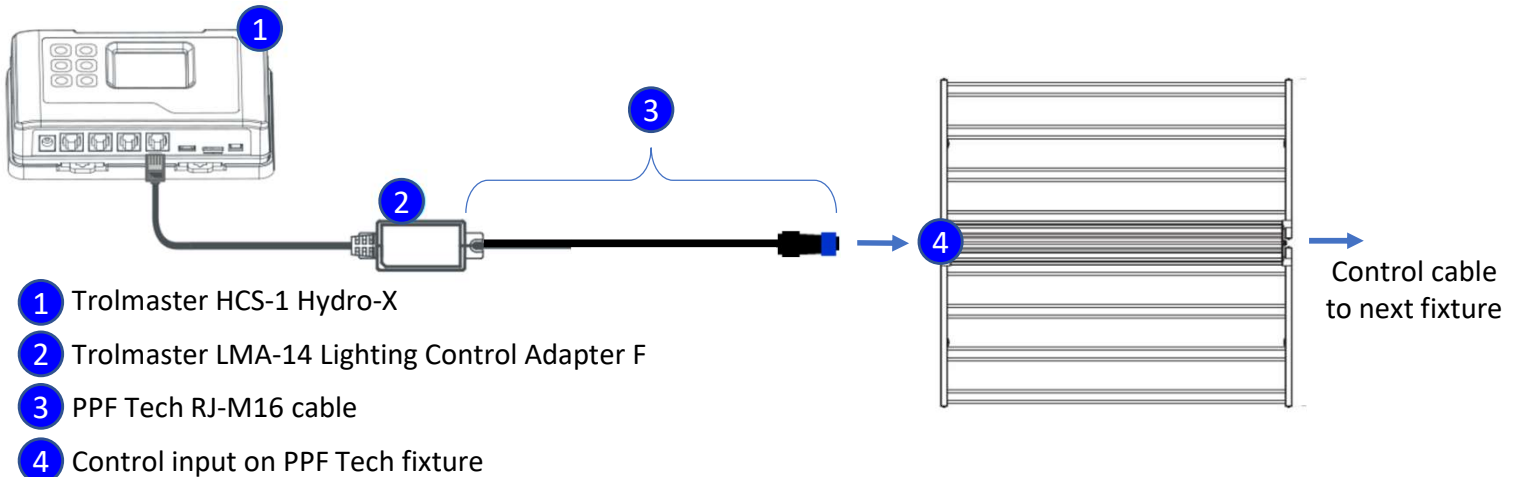

When troubleshooting, first check the RJ to LMA-14 connection by setting the Trolmaster control to 25% dim and pushing the RJ side of the RJ-M16 cord fully into the LMA-14 socket. Fixtures will alternate between bright and dim if this connection is loose. If needed, secure this connection with zip tie or electrical tape.