


### Features & Benefits

- Daisy chain power (up to 9 fixtures / circuit)
- Daisy chain controls (up to 50 fixtures / circuit)
- IP65 Rating – suitable for wet environment
- Secure M19 twist-lock power connections
- Long, slim LED array provides great light coverage with minimum blockage of natural light
- Quality components including Osram LED
- 0-10V dimming capable (Off to 100%)
- 1,060  $\mu\text{mol}$  at 400W (2.7  $\mu\text{mol}/\text{W}$ )
- Quick install
- Long life – 50,000 hours (L90)
- Balanced spectrum with red weighting for robust veg
- Secure 3' hanging chains (140 lb working load)

### Output

- PPF ( $\mu\text{mol}$ ) 1,060
- Efficacy ( $\mu\text{mol}/\text{J}$ ) 2.7
- Spectrum Full spectrum
- CCT (Kelvin) 4,000

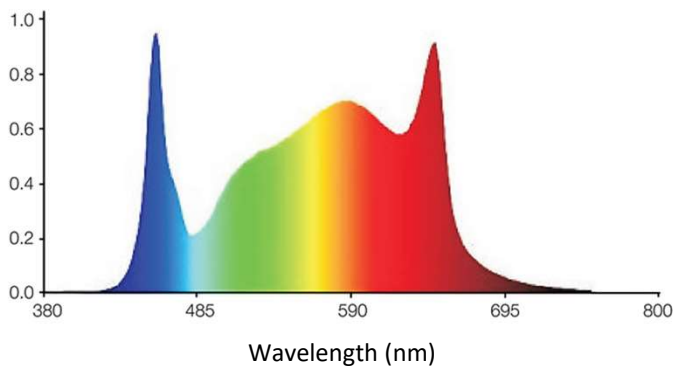

### Electrical

Input power (W) 400  
 Input voltage (V) AC 120-277 auto sense


AC Voltage (V)	120	240	277
AC Current (A)	3.44	1.73	1.53
Power Factor	0.99	0.97	0.95
Max fixtures / 20A	4	8	9

Dimming 0-10V

### Mechanical & Safety

Weight (lbs.) 27.6  
 Dimensions (LxWxH inches) 35.8 x 5.4 x 8.1  
 Input/output power M19 3-pin  
 Input/output control M16 2-pin  
 Operating temperature ( $^{\circ}\text{C}$ ) -20 to 35

3 Year Warranty

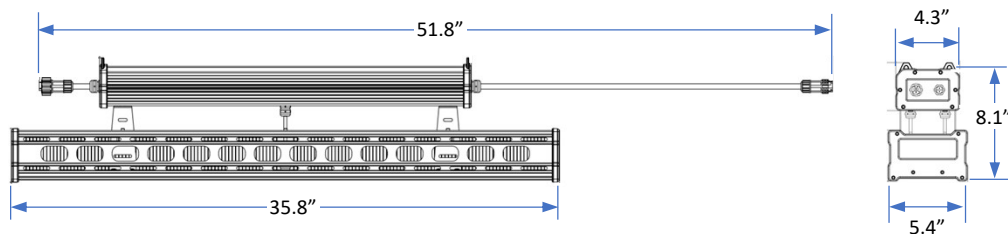

**Ordering Codes: Power Cords**

PC-14G-6-120	Power cord 6' with NEMA 5-15P 120V plug
PC-14G-6-240	Power cord 6' with NEMA 6-15P 240V plug
PC-14G-6-277	Power cord 6' with NEMA L7-15P 277V plug
PCF-14G-6	Fixture to fixture power cord 6' with M19 plugs
PCF-14G-10	Fixture to fixture power cord 10' with M19 plugs

**Ordering Codes: Controls**

CC-5-1	Fixture to fixture control cord 5', M16 plugs
CC-10-1	Fixture to fixture control cord 10', M16 plugs
CD-1	Zigbee Control Device
GA-1	Gateway
CD-3	Hard-wired Control Device

