
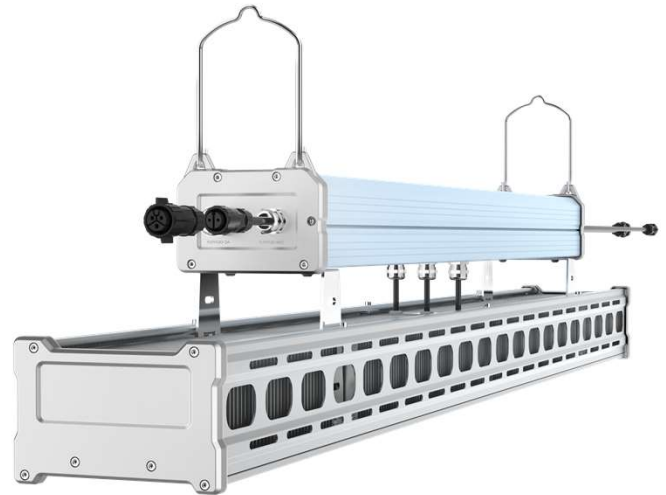


### Features & Benefits

- Daisy chain power (up to 7 fixtures / circuit)
- Daisy chain controls (up to 50 fixtures / circuit)
- IP65 Rating – suitable for wet environment
- Secure M19 twist-lock power connections
- Long, slim LED array provides great light coverage with minimum blockage of natural light
- Quality components including Osram LED
- 1-10V dimming capable (Dim to 100%)
- 1,450  $\mu\text{mol}$  at 550W (2.7  $\mu\text{mol}/\text{W}$ )
- Quick install
- Long life – 50,000 hours (L90)
- Balanced spectrum with red weighting for robust flower
- Secure 3' hanging chains (143 lb working load)

### Output

- PPF ( $\mu\text{mol}$ ) 1,450
- Efficacy ( $\mu\text{mol}/\text{J}$ ) 2.6
- Spectrum Full spectrum, red weighted
- CCT (Kelvin) 3,200

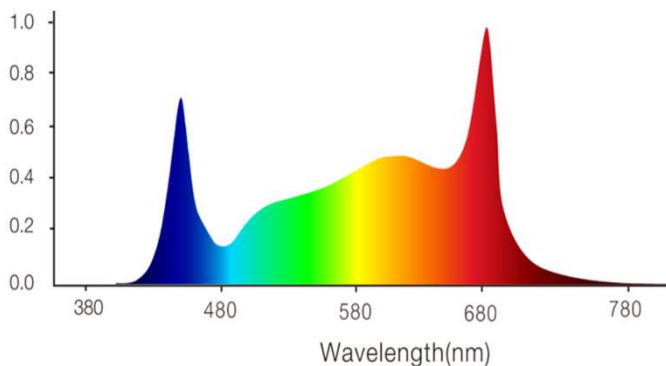


### Electrical

Input power (W)	550		
Input voltage (V)	AC120-277 auto sense		
<b>AC Voltage (V)</b>	<b>120</b>	<b>240</b>	<b>277</b>
AC Current (A)	4.70	2.38	2.10
Power Factor	0.99	0.97	0.95
Max fixtures / 20A	3	6	7
Dimming	1-10V		

### Mechanical & Safety

Weight (lbs.)	27.1
Dimensions (LxWxH inches)	47.6 x 4.3 x 8.1
Input/output power	M19 3-pin
Input/output control	M16 2-pin
Operating temperature ( $^{\circ}\text{C}$ )	-20 to 35

3 Year Warranty

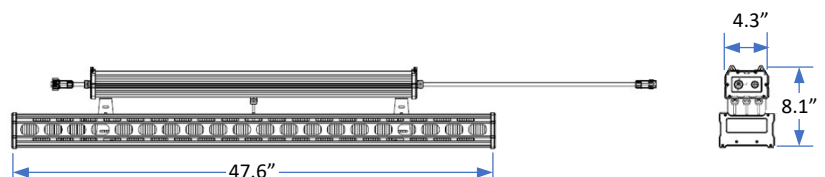

**Ordering Codes: Power Cords**

PC-14G-6-120	Power cord 6' with NEMA 5-15P 120V plug
PC-14G-6-240	Power cord 6' with NEMA 6-15P 240V plug
PC-14G-6-277	Power cord 6' with NEMA L7-15P 277V plug
PCF-14G-6	Fixture to fixture power cord 6' with M19 plugs
PCF-14G-10	Fixture to fixture power cord 10' with M19 plugs

**Ordering Codes: Controls**

CC-5-1	Fixture to fixture control cord 5', M16 plugs
CC-10-1	Fixture to fixture control cord 10', M16 plugs
CD-1	Zigbee Control Device
GA-1	Gateway
CD-3	Hard-wired Control Device

